


# SURFACE-MOUNT WOUND MOLDED CHIP INDUCTORS

## AIMS1008 SERIES



### FEATURES:

- Lead-free materials is used for the plating on the terminals.
- The product uses metal terminals, which realize excellent connection reliability.
- High resistance to heat, humidity, mechanical shocks and presser. Accurate dimensions for automatically surface mounted.
- The product has good heat durability that withstands lead-free compatible reflow soldering conditions.


### APPLICATIONS:

- Communication
- Equipment
- Instrument
- Video & audio

## ELECTRICAL CHARACTERISTICS:

Part Number	L $\mu$ H	Tol %	Q Min	SRF MHz Min	DCR $\Omega$ Max	IDC Max mA	Test Freq MHz	Part Number	L $\mu$ H	Tol %	Q Min	SRF MHz Min	DCR $\Omega$ Max	IDC Max mA	Test Freq MHz
AIMS1008-10NK	.010	$\pm 10$	10	2150	0.26	530	100	AIMS1008-1R2J	1.2	$\pm 5$	30	180	1.20	230	7.96
AIMS1008-12NK	.012	$\pm 10$	15	2050	0.27	500	100	AIMS1008-1R5J	1.5	$\pm 5$	30	135	1.30	200	7.96
AIMS1008-15NK	.015	$\pm 10$	15	1850	0.31	480	100	AIMS1008-1R8J	1.8	$\pm 5$	30	100	1.45	210	7.96
AIMS1008-18NK	.018	$\pm 10$	15	1650	0.34	450	100	AIMS1008-2R2J	2.2	$\pm 5$	30	75	1.55	200	7.96
AIMS1008-22NK	.022	$\pm 10$	15	1550	0.38	420	100	AIMS1008-2R7J	2.7	$\pm 5$	30	55	1.70	195	7.96
AIMS1008-27NK	.027	$\pm 10$	15	1400	0.42	410	100	AIMS1008-3R3J	3.3	$\pm 5$	30	48	1.90	185	7.96
AIMS1008-33NK	.033	$\pm 10$	15	1250	0.46	400	100	AIMS1008-3R9J	3.9	$\pm 5$	30	43	2.10	180	7.96
AIMS1008-39NK	.039	$\pm 10$	20	1100	0.50	380	100	AIMS1008-4R7J	4.7	$\pm 5$	30	40	2.30	175	7.96
AIMS1008-47NK	.047	$\pm 10$	20	1050	0.56	360	100	AIMS1008-5R6J	5.6	$\pm 5$	25	36	2.50	170	7.96
AIMS1008-56NK	.056	$\pm 10$	20	950	0.65	340	100	AIMS1008-6R8J	6.8	$\pm 5$	25	33	2.70	165	7.96
AIMS1008-68NK	.068	$\pm 10$	20	900	0.70	320	100	AIMS1008-8R2J	8.2	$\pm 5$	25	30	3.05	160	7.96
AIMS1008-82NK	.082	$\pm 10$	20	850	0.75	300	100	AIMS1008-100J	10	$\pm 5$	25	27	3.50	155	2.52
AIMS1008-R10K	.10	$\pm 10$	20	700	0.80	280	100	AIMS1008-120J	12	$\pm 5$	25	23	3.80	150	2.52
AIMS1008-R12K	.12	$\pm 10$	30	600	0.37	520	25.2	AIMS1008-150J	15	$\pm 5$	25	20	4.40	140	2.52
AIMS1008-R15K	.15	$\pm 10$	30	550	0.42	480	25.2	AIMS1008-180J	18	$\pm 5$	25	18	4.80	130	2.52
AIMS1008-R18K	.18	$\pm 10$	30	500	0.46	460	25.2	AIMS1008-220J	22	$\pm 5$	25	17	5.50	125	2.52
AIMS1008-R22K	.22	$\pm 10$	30	450	0.52	430	25.2	AIMS1008-270J	27	$\pm 5$	25	16	6.30	115	2.52
AIMS1008-R27K	.27	$\pm 10$	30	425	0.56	420	25.2	AIMS1008-330J	33	$\pm 5$	20	15	7.10	110	2.52
AIMS1008-R33K	.33	$\pm 10$	30	400	0.60	400	25.2	AIMS1008-390J	39	$\pm 5$	20	14	9.50	90	2.52
AIMS1008-R39K	.39	$\pm 10$	30	375	0.65	375	25.2	AIMS1008-470J	47	$\pm 5$	20	13	11.10	80	2.25
AIMS1008-R47K	.47	$\pm 10$	30	350	0.68	350	25.2	AIMS1008-560J	56	$\pm 5$	20	12	12.10	75	2.52
AIMS1008-R56K	.56	$\pm 10$	30	300	0.75	325	25.2	AIMS1008-680J	68	$\pm 5$	20	11	16.60	70	2.52
AIMS1008-R68K	.68	$\pm 10$	30	270	0.85	300	25.2	AIMS1008-820J	82	$\pm 5$	20	10	19.00	65	2.52
AIMS1008-R82K	.82	$\pm 10$	30	250	1.00	260	25.2	AIMS1008-101J	100	$\pm 5$	15	9	21.00	60	0.796
AIMS1008-1R0J	1.00	$\pm 5$	30	220	1.10	245	7.96								

## PHYSICAL CHARACTERISTICS

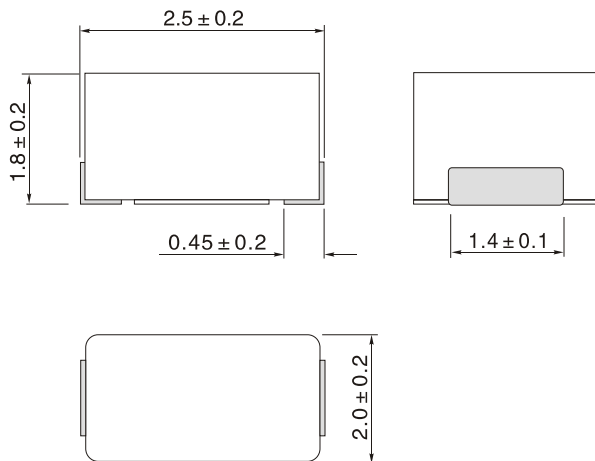

### Winding




- Testing: (Equivalent acceptable)  
Inductance: HP4285A  
RDC: QuadTech 1880 Milliohmmer  
Q: HP4342A  
SRF: HP4291A
- Operating temperature:  $-25^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Storage Temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Resistance to soldering heat:  $260^{\circ}\text{C}$  for 10 seconds
- Marking: Inductance & Tolerance

Note: All specifications subject to change without notice.

# SURFACE MOUNT WOUND MOLDED CHIP INDUCTORS

## AISM1210 SERIES



### FEATURES:

- Lead-free materials is used for the plating on the terminals.
- The product uses metal terminals, which realize excellent connection reliability.
- High resistance to heat, humidity, mechanical shocks and presser. Accurate dimensions for automatically surface mounted.
- The product has good heat durability that withstands lead-free compatible reflow soldering conditions.

### APPLICATIONS:


- Communication
- Equipment
- Instrument
- Video & audio

## ELECTRICAL CHARACTERISTICS:

Part Number	Inductance (uH)	Inductance Tolerance (%)	Q min.	Test Frequency L,Q (MHz)	Self-resonant Frequency (MHz)min.	DC resistance (Ω) max.	Rated current. (mA)max.
AISM1210-R10 □	0.1	± 20, ± 10%	28	100	700	0.44	450
AISM1210-R12 □	0.12	± 20, ± 10%	30	25.2	500	0.22	450
AISM1210-R15 □	0.15	± 20, ± 10%	30	25.2	450	0.25	450
AISM1210-R18 □	0.18	± 20, ± 10%	30	25.2	400	0.28	450
AISM1210-R22 □	0.22	± 20, ± 10%	30	25.2	350	0.32	450
AISM1210-R27 □	0.27	± 20, ± 10%	30	25.2	320	0.36	450
AISM1210-R33 □	0.33	± 20, ± 10%	30	25.2	300	0.4	450
AISM1210-R39 □	0.39	± 20, ± 10%	30	25.2	250	0.45	450
AISM1210-R47 □	0.47	± 20, ± 10%	30	25.2	220	0.5	450
AISM1210-R56 □	0.56	± 20, ± 10%	30	25.2	180	0.55	450
AISM1210-R68 □	0.68	± 20, ± 10%	30	25.2	160	0.6	450
AISM1210-R82 □	0.82	± 20, ± 10%	30	25.2	140	0.65	450
AISM1210-1R0 □	1	± 10%, ± 5%	30	7.96	120	0.7	400
AISM1210-1R2 □	1.2	± 10%, ± 5%	30	7.96	100	0.75	390
AISM1210-1R5 □	1.5	± 10%, ± 5%	30	7.96	85	0.85	370
AISM1210-1R8 □	1.8	± 10%, ± 5%	30	7.96	80	0.9	350
AISM1210-2R2 □	2.2	± 10%, ± 5%	30	7.96	75	1	320
AISM1210-2R7 □	2.7	± 10%, ± 5%	30	7.96	70	1.1	290
AISM1210-3R3 □	3.3	± 10%, ± 5%	30	7.96	60	1.2	260
AISM1210-3R9 □	3.9	± 10%, ± 5%	30	7.96	55	1.3	250
AISM1210-4R7 □	4.7	± 10%, ± 5%	30	7.96	50	1.5	220
AISM1210-5R6 □	5.6	± 10%, ± 5%	30	7.96	45	1.6	200
AISM1210-6R8 □	6.8	± 10%, ± 5%	30	7.96	40	1.8	180
AISM1210-8R2 □	8.2	± 10%, ± 5%	30	7.96	35	2	170
AISM1210-100 □	10	± 10%, ± 5%	30	2.52	30	2.1	150
AISM1210-120 □	12	± 10%, ± 5%	30	2.52	20	2.5	140
AISM1210-150 □	15	± 10%, ± 5%	30	2.52	20	2.8	130
AISM1210-180 □	18	± 10%, ± 5%	30	2.52	20	3.3	120
AISM1210-220 □	22	± 10%, ± 5%	30	2.52	20	3.7	110
AISM1210-270 □	27	± 10%, ± 5%	30	2.52	20	5	80
AISM1210-330 □	33	± 10%, ± 5%	30	2.52	17	5.6	70
AISM1210-390 □	39	± 10%, ± 5%	30	2.52	16	6.4	65
AISM1210-470 □	47	± 10%, ± 5%	30	2.52	15	7	60
AISM1210-560 □	56	± 10%, ± 5%	30	2.52	13	8	55
AISM1210-680 □	68	± 10%, ± 5%	30	2.52	12	9	50
AISM1210-820 □	82	± 10%, ± 5%	30	2.52	11	10	45
AISM1210-101 □	100	± 10%, ± 5%	20	0.796	10	10	40
AISM1210-121 □	120	± 10%, ± 5%	20	0.796	10	11	70
AISM1210-151 □	150	± 10%, ± 5%	20	0.796	8	15	65
AISM1210-181 □	180	± 10%, ± 5%	20	0.796	7	17	60
AISM1210-221 □	220	± 10%, ± 5%	20	0.796	7	21	50

□ G=± 2%, J=± 5%, K=± 10%, M=± 20%, N=± 30%

**PHYSICAL CHARACTERISTICS**


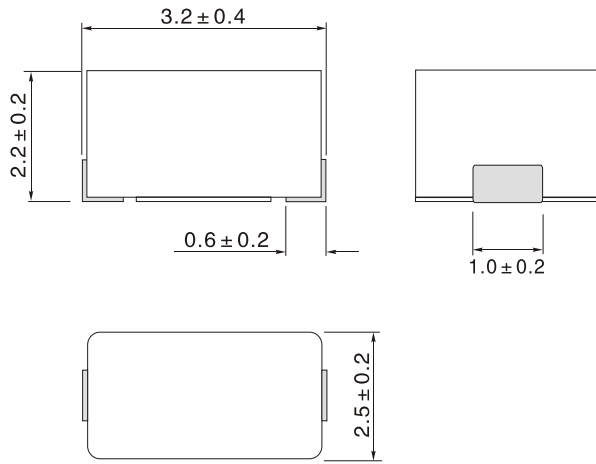


**Winding**




- Testing: (Equivalent acceptable)  
Inductance:HP4285A  
RDC:QuadTech 1880 Milliohmmer  
Q: HP4342A  
SRF:HP4291A
- Operating temperature: -25°C to +85°C
- Storage Temperature: -40°C to +85°C
- Resistance to soldering heat:260°C for 10 seconds
- Marking: Inductance & Tolerance

**INDUCTANCE VS FREQUENCY CURVE      IMPEDANCE VS FREQUENCY CURVE**

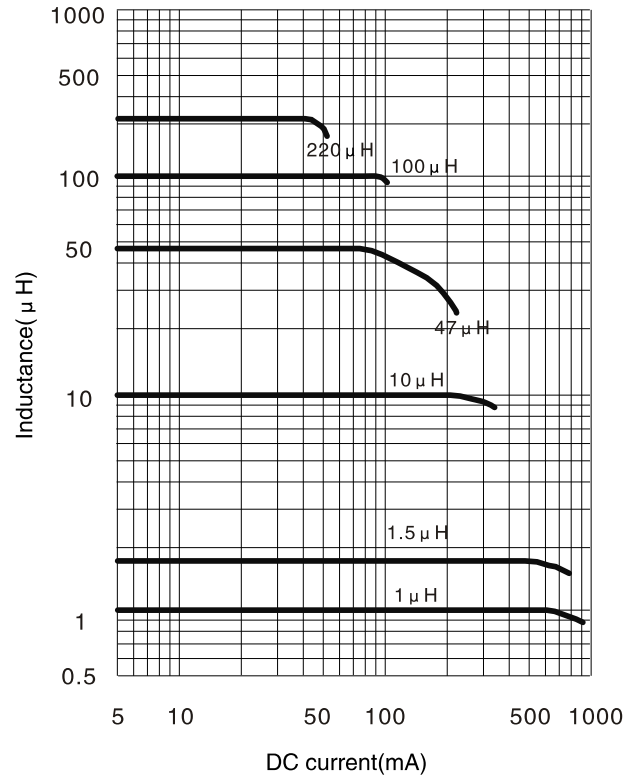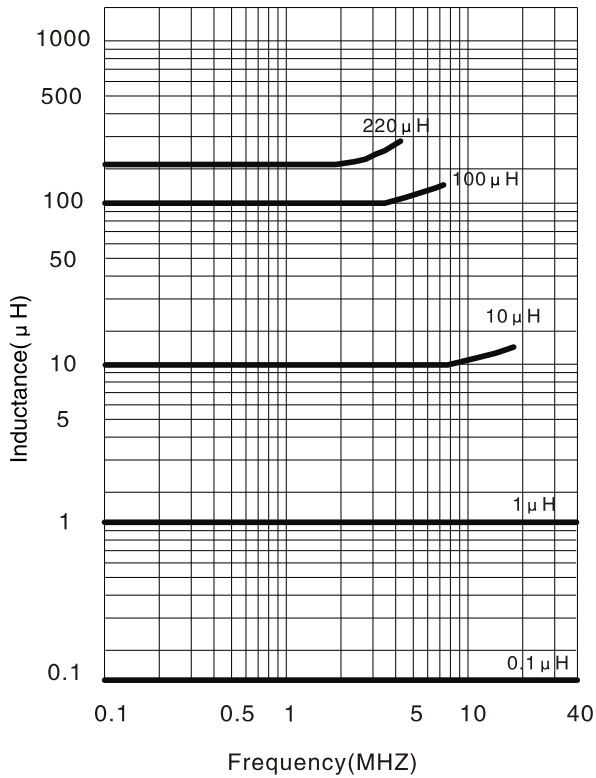

# SURFACE MOUNT WOUND MOLDED CHIP INDUCTORS

## AISM1812 SERIES



### FEATURES:

- Lead-free materials is used for the plating on the terminals.
- The product uses metal terminals, which realize excellent connection reliability.
- High resistance to heat, humidity, mechanical shocks and presser. Accurate dimensions for automatically surface mounted.
- The product has good heat durability that withstands lead-free compatible reflow soldering conditions.

### APPLICATIONS:


- Communication
- Equipment
- Instrument
- Video & audio

### ELECTRICAL CHARACTERISTICS:

Part Number	Inductance (uH)	Inductance Tolerance (%)	Q min.	Test Frequency L,Q (MHz)	Self-resonant Frequency (MHz)min.	DC resistance (Ω) max.	Rated current. (mA)max.
AISM1812-R10 □	0.1	± 10%, ± 20%	35	25.2	300	0.18	800
AISM1812-R12 □	0.12	± 10%, ± 20%	35	25.2	280	0.20	770
AISM1812-R15 □	0.15	± 10%, ± 20%	35	25.2	250	0.22	730
AISM1812-R18 □	0.18	± 10%, ± 20%	35	25.2	220	0.24	700
AISM1812-R22 □	0.22	± 10%, ± 20%	40	25.2	200	0.25	665
AISM1812-R27 □	0.27	± 10%, ± 20%	40	25.2	180	0.26	635
AISM1812-R33 □	0.33	± 10%, ± 20%	40	25.2	165	0.28	605
AISM1812-R39 □	0.39	± 10%, ± 20%	40	25.2	150	0.30	575
AISM1812-R47 □	0.47	± 10%, ± 20%	40	25.2	145	0.32	545
AISM1812-R56 □	0.56	± 10%, ± 20%	40	25.2	140	0.36	520
AISM1812-R68 □	0.68	± 10%, ± 20%	40	25.2	135	0.40	500
AISM1812-R82 □	0.82	± 10%, ± 20%	40	25.2	130	0.45	475
AISM1812-1R0 □	1.0	± 10%, ± 20%	50	7.96	100	0.5	450
AISM1812-1R2 □	1.2	± 10%, ± 20%	50	7.96	80	0.55	430
AISM1812-1R5 □	1.5	± 10%, ± 20%	50	7.96	70	0.6	410
AISM1812-1R8 □	1.8	± 10%, ± 20%	50	7.96	60	0.65	390
AISM1812-2R2 □	2.2	± 10%, ± 20%	50	7.96	55	0.7	380
AISM1812-2R7 □	2.7	± 10%, ± 20%	50	7.96	50	0.75	370
AISM1812-3R3 □	3.3	± 10%, ± 20%	50	7.96	45	0.8	355
AISM1812-3R9 □	3.9	± 10%, ± 20%	50	7.96	40	0.9	330
AISM1812-4R7 □	4.7	± 10%, ± 20%	50	7.96	35	1	315
AISM1812-5R6 □	5.6	± 10%, ± 20%	50	7.96	33	1.1	300
AISM1812-6R8 □	6.8	± 10%, ± 20%	50	7.96	27	1.2	285
AISM1812-8R2 □	8.2	± 5%, ± 10%	50	7.96	25	1.4	270
AISM1812-100 □	10	± 5%, ± 10%	50	2.52	20	1.6	250
AISM1812-120 □	12	± 5%, ± 10%	50	2.52	18	2	225
AISM1812-150 □	15	± 5%, ± 10%	50	2.52	17	2.5	200
AISM1812-180 □	18	± 5%, ± 10%	50	2.52	15	2.8	190
AISM1812-220 □	22	± 5%, ± 10%	50	2.52	13	3.2	180
AISM1812-270 □	27	± 5%, ± 10%	50	2.52	12	3.6	170
AISM1812-330 □	33	± 5%, ± 10%	50	2.52	11	4	160
AISM1812-390 □	39	± 5%, ± 10%	50	2.52	10	4.5	150
AISM1812-470 □	47	± 5%, ± 10%	50	2.52	10	5	140
AISM1812-560 □	56	± 5%, ± 10%	50	2.52	9	5.5	135
AISM1812-680 □	68	± 5%, ± 10%	50	2.52	9	6	130
AISM1812-820 □	82	± 5%, ± 10%	50	2.52	8	7	120
AISM1812-101 □	100	± 5%, ± 10%	40	0.796	8	8	110
AISM1812-121 □	120	± 5%, ± 10%	40	0.796	6	8	110
AISM1812-151 □	150	± 5%, ± 10%	40	0.796	5	9	105
AISM1812-181 □	180	± 5%, ± 10%	40	0.796	5	9.5	102
AISM1812-221 □	220	± 5%, ± 10%	40	0.796	4	10	100
AISM1812-271 □	270	± 5%, ± 10%	40	0.796	4	12	92
AISM1812-331 □	330	± 5%, ± 10%	40	0.796	3.5	14	85
AISM1812-391 □	390	± 5%, ± 10%	40	0.796	3	18	80
AISM1812-471 □	470	± 5%, ± 10%	40	0.796	3	26	62
AISM1812-561 □	560	± 5%, ± 10%	30	0.796	3	30	50
AISM1812-681 □	680	± 5%, ± 10%	30	0.796	3	30	50
AISM1812-821 □	820	± 5%, ± 10%	30	0.796	2.5	35	30
AISM1812-102 □	1000	± 5%, ± 10%	20	0.252	2.5	40	30

□ G=± 2%, J=± 5%, K=± 10%, M=± 20%, N=± 30%

## PHYSICAL CHARACTERISTICS


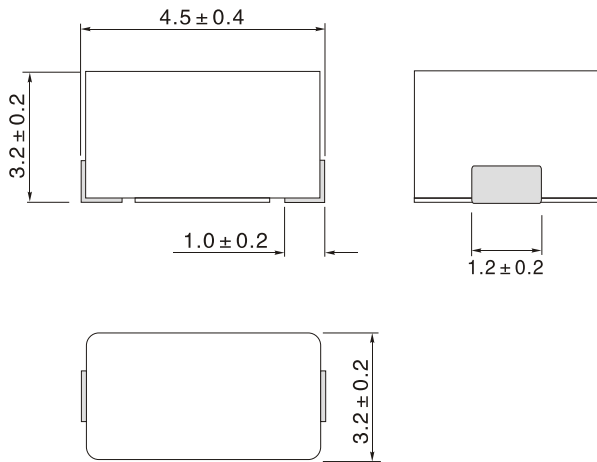



### Winding



- Testing: (Equivalent acceptable)
- Inductance: HP4285A
- RDC: QuadTech 1880 Milliohmeter
- Q: HP4342A
- SRF: HP4291A
- Operating temperature: -25°C to +85°C
- Storage Temperature: -40°C to +85°C
- Resistance to soldering heat: 260°C for 10 seconds
- Marking: Inductance & Tolerance

## DC BIASE CURVE      IMPEDANCE VS FREQUENCY CURVE

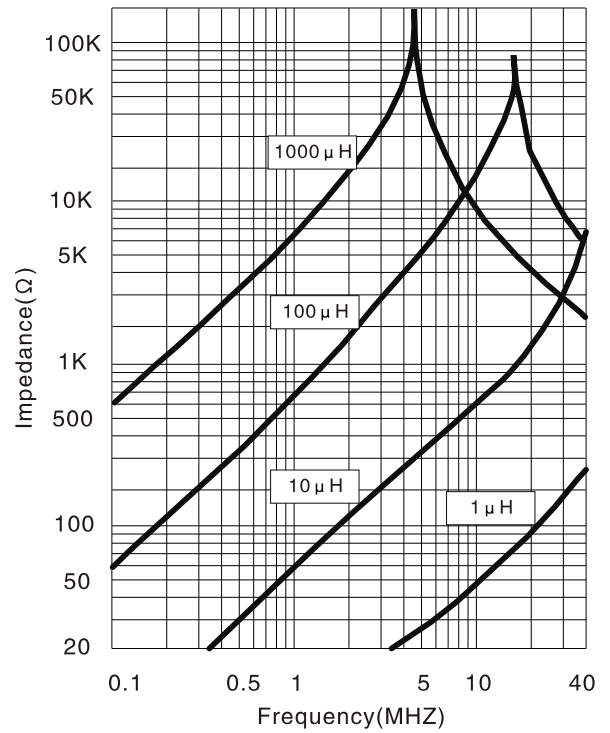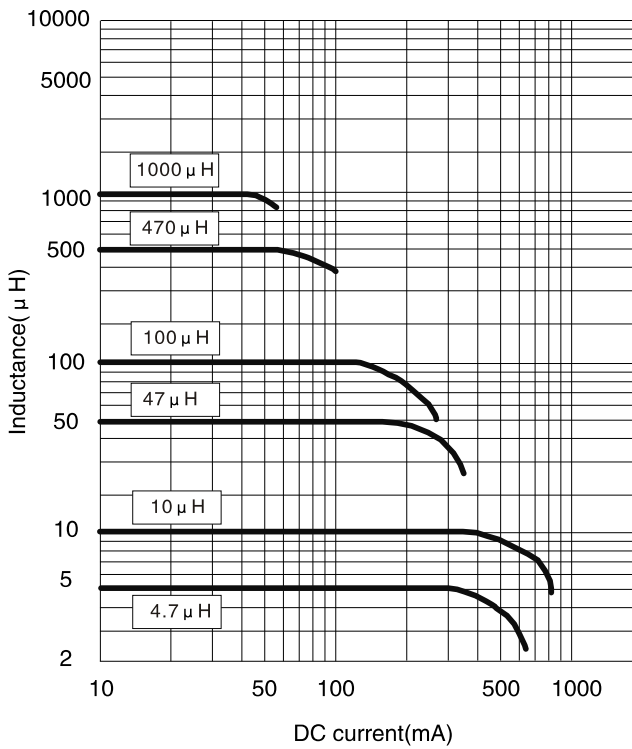



# SURFACE-MOUNT WOUND MOLDED CHIP INDUCTORS

## AISM-2220 SERIES

### FEATURES:

- Molded construction
- Heat Resistant Molded Resin
- Excellent Mechanical Strength
- Excellent Solderability
- High Reliability
- Low Profile

### OPTIONS:

- Packaging: Tape & Reel is standard (Qty:500pcs)
- Bulk packaging available for smaller quantities
- Tolerance: 10% and 5% is standard, tighter tolerances available

### COMMON APPLICATIONS:

- VCRs
- Video Cameras
- Communication System
- Automotive Systems
- Liquid Crystal Televisions
- Hard Disk Drives
- Network Systems
- Computer Peripheral Equipment

### ELECTRICAL CHARACTERISTICS:

Part Number	L $\mu$ H	Q Min	SRF MHz Min	DCR $\Omega$ Max	IDC Max mA	Test Freq MHz	Part Number	L $\mu$ H	Q Min	SRF MHz Min	DCR $\Omega$ Max	IDC Max mA	Test Freq MHz
AISM-2220-1R0K	1.00	10	95	0.030	1800	7.96	AISM-2220-121K	120	20	5.4	1.9	230	0.796
AISM-2220-1R2K	1.20	10	70	0.035	1700	7.96	AISM-2220-151K	150	20	4.8	2.2	210	0.796
AISM-2220-1R5K	1.50	10	55	0.04	1600	7.96	AISM-2220-181K	180	20	4.4	2.8	190	0.796
AISM-2220-1R8K	1.80	10	47	0.05	1400	7.96	AISM-2220-221K	220	20	3.9	3.4	170	0.796
AISM-2220-2R2K	2.20	10	42	0.06	1300	7.96	AISM-2220-271K	270	20	3.6	4.2	155	0.796
AISM-2220-2R7K	2.70	10	37	0.07	1200	7.96	AISM-2220-331K	330	20	3.2	4.9	140	0.796
AISM-2220-3R3K	3.30	10	34	0.08	1120	7.96	AISM-2220-391K	390	20	2.9	5.8	130	0.796
AISM-2220-3R9K	3.90	10	32	0.09	1050	7.96	AISM-2220-471K	470	20	2.6	7.0	120	0.796
AISM-2220-4R7K	4.70	10	29	0.11	950	7.96	AISM-2220-561K	560	20	2.4	8.5	110	0.796
AISM-2220-5R6K	5.60	10	26	0.13	880	7.96	AISM-2220-681K	680	20	2.2	10	100	0.796
AISM-2220-6R8K	6.80	10	24	0.15	810	7.96	AISM-2220-821K	820	20	2.0	13	90	0.796
AISM-2220-8R2K	8.20	10	22	0.18	750	7.96	AISM-2220-102K	1000	20	1.8	15	85	0.252
AISM-2220-100K	10.00	10	19	0.21	690	2.52	AISM-2220-122J	1200	30	1.5	17	75	0.252
AISM-2220-120K	12.00	10	17	0.25	630	2.52	AISM-2220-152J	1500	30	1.4	20	70	0.252
AISM-2220-150K	15.00	10	16	0.30	580	2.52	AISM-2220-182J	1800	30	1.3	30	60	0.252
AISM-2220-180K	18.00	10	14	0.36	530	2.52	AISM-2220-222J	2200	30	1.2	35	55	0.252
AISM-2220-220K	22.00	10	13	0.43	480	2.52	AISM-2220-272J	2700	30	1.1	55	45	0.252
AISM-2220-270K	27.00	10	11.5	0.52	440	2.52	AISM-2220-332J	3300	30	1.0	60	40	0.252
AISM-2220-330K	33.00	10	10.5	0.62	400	2.52	AISM-2220-392J	3900	30	1.0	70	38	0.252
AISM-2220-390K	39.00	10	9.5	0.72	370	2.52	AISM-2220-472J	4700	30	0.9	78	36	0.252
AISM-2220-470K	47.00	10	8.5	0.85	340	2.52	AISM-2220-562J	5600	30	0.8	85	33	0.252
AISM-2220-560K	56.00	10	7.8	1.0	310	2.52	AISM-2220-682J	6800	30	0.7	110	30	0.252
AISM-2220-680K	68.00	10	7.0	1.2	290	2.52	AISM-2220-822J	8200	30	0.6	125	28	0.252
AISM-2220-820K	82.00	10	6.4	1.4	270	2.52	AISM-2220-103J	10000	20	0.5	150	25	0.0796
AISM-2220-101K	100	20	6.0	1.6	250	0.796							


Note: 1. J  $\pm$  5%, K  $\pm$  10%, M  $\pm$  20%,

### TECHNICAL INFORMATION:

- Testing: (Equivalent acceptable)
- Inductance: HP4285A
- RDC: QuadTech 1880 Milliohmmer
- Q- HP4342A - SRF-HP4191A
- IDC Max: Determined when superimposed
- DC current is decreased 10% against its initial value
- Operating temperature: -40°C to +105°C
- Storage Temperature: -40°C to +105°C
- Solder methods: Vapor Phase, Infrared Reflow
- Resistance to soldering heat: 260°C for 10 seconds
- Solvent resistance: Conforms to MIL-STD-202E
- Marking: Inductance & Tolerance

Note: All specifications subject to change without notice.


### PHYSICAL CHARACTERISTICS:

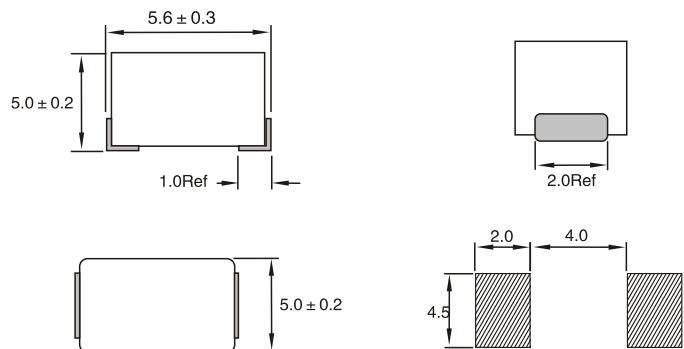

Dimensions: (mm)

# HIGH CURRENT SURFACE MOUNT WOUND MOLDED CHIP INDUCTORS

## AISM1210C SERIES



### FEATURES:

- Lead-free materials is used for the plating on the terminals.
- The product uses metal terminals, which realize excellent connection reliability.
- High resistance to heat, humidity, mechanical shocks and presser. Accurate dimensions for automatically surface mounted.
- The product has good heat durability that withstands lead-free compatible reflow soldering conditions.


### APPLICATIONS:

- Communication
- Equipment
- Instrument
- Video & audio

## ELECTRICAL CHARACTERISTICS:

Part Number	Inductance (uH)	Inductance Tolerance (%)	Q min.	Test Frequency L,Q (MHz)	Self-resonant Frequency (MHz)min.	DC resistance (Ω) max.	Rated current. (mA)max.
AISM1210C-1R0M	1	± 20%	10	7.96	100	0.156	770
AISM1210C-1R5M	1.5	± 20%	10	7.96	80	0.195	580
AISM1210C-2R2M	2.2	± 20%	10	7.96	65	0.260	480
AISM1210C-3R3M	3.3	± 20%	10	7.96	55	0.325	400
AISM1210C-4R7M	4.7	± 20%	10	7.96	45	0.520	320
AISM1210C-6R8M	6.8	± 20%	10	7.96	35	0.650	280
AISM1210C-100K	10	± 10%	15	2.52	28	1.105	220
AISM1210C-150K	15	± 10%	15	2.52	25	1.69	180
AISM1210C-220K	22	± 10%	15	2.52	20	2.60	145
AISM1210C-330K	33	± 10%	15	2.52	15	3.64	115
AISM1210C-390K	39	± 10%	15	2.52	14	4.50	110
AISM1210C-470K	47	± 10%	15	2.52	13	5.46	105
AISM1210C-680K	68	± 10%	15	2.52	10	8.45	85
AISM1210C-820K	82	± 10%	15	2.52	9	8.71	80
AISM1210C-101K	100	± 10%	15	0.796	8	9.14	75

## PHYSICAL CHARACTERISTICS

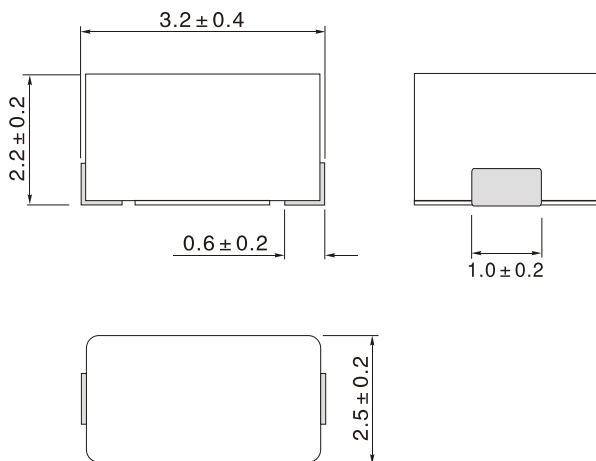


### Winding




- Testing: (Equivalent acceptable)  
Inductance:HP4285A  
RDC:QuadTech 1880 Milliohmmer  
Q: HP4342A  
SRF:HP4291A
- Operating temperature: -25°C to +85°C
- Storage Temperature: -40°C to +85°C
- Resistance to soldering heat:260°C for 10 seconds
- Marking: Inductance & Tolerance

## DC BISE CURVE

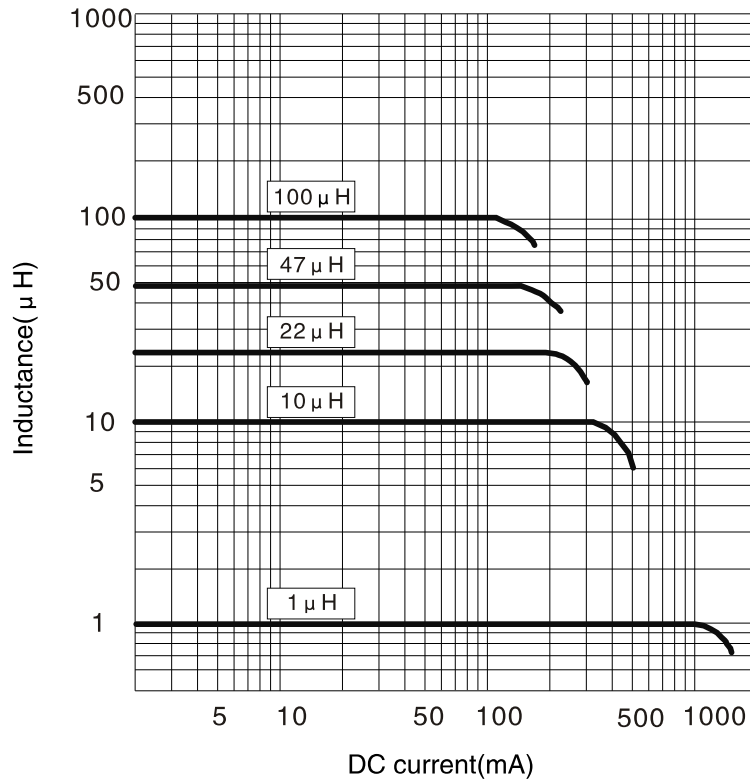


## IMPEDANCE VS FREQUENCY CURVE

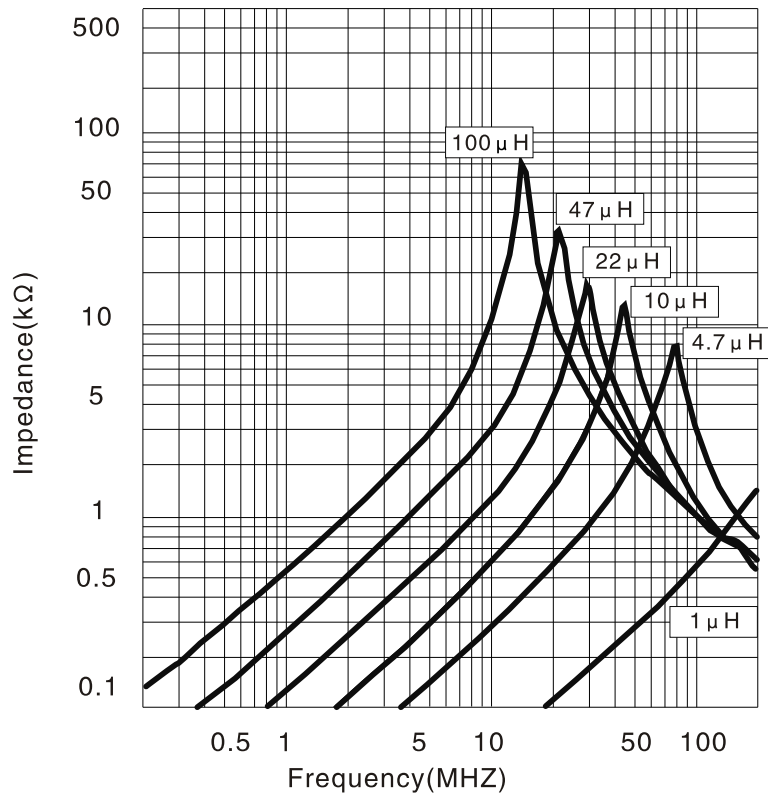

# HIGH CURRENT SURFACE MOUNT WOUND MOLDED CHIP INDUCTORS

## AISM1812C SERIES



### FEATURES:

- Lead-free materials is used for the plating on the terminals.
- The product uses metal terminals, which realize excellent connection reliability.
- High resistance to heat, humidity, mechanical shocks and presser. Accurate dimensions for automatically surface mounted.
- The product has good heat durability that withstands lead-free compatible reflow soldering conditions.


### APPLICATIONS:

- Communication
- Equipment
- Instrument
- Video & audio

## ELECTRICAL CHARACTERISTICS:

Part Number	Inductance (uH)	Inductance Tolerance (%)	Q min.	Test Frequency L,Q (MHz)	Self-resonant Frequency (MHz)min.	DC resistance (Ω) max.	Rated current. (mA)max.
AISM1812C-1R0K	1.0	± 10%	10	7.96	180	0.11	1050
AISM1812C-1R2K	1.2	± 10%	10	7.96	160	0.12	1000
AISM1812C-1R5K	1.5	± 10%	10	7.96	130	0.15	950
AISM1812C-1R8K	1.8	± 10%	10	7.96	100	0.16	900
AISM1812C-2R2K	2.2	± 10%	10	7.96	80	0.18	850
AISM1812C-2R7K	2.7	± 10%	10	7.96	60	0.20	800
AISM1812C-3R3K	3.3	± 10%	10	7.96	45	0.22	750
AISM1812C-3R9K	3.9	± 10%	10	7.96	40	0.24	700
AISM1812C-4R7K	4.7	± 10%	10	7.96	35	0.27	650
AISM1812C-5R6K	5.6	± 10%	10	7.96	30	0.30	650
AISM1812C-6R8K	6.8	± 10%	10	7.96	28	0.35	600
AISM1812C-8R2K	8.2	± 10%	10	7.96	25	0.40	600
AISM1812C-100K	10	± 10%	10	2.52	22	0.50	550
AISM1812C-120K	12	± 10%	10	2.52	21	0.60	500
AISM1812C-150K	15	± 10%	10	2.52	20	0.70	450
AISM1812C-180K	18	± 10%	10	2.52	19	0.80	400
AISM1812C-220K	22	± 10%	10	2.52	18	0.9	370
AISM1812C-270K	27	± 10%	10	2.52	16	1.2	330
AISM1812C-330K	33	± 10%	10	2.52	14	1.4	300
AISM1812C-390K	39	± 10%	10	2.52	12	1.6	280
AISM1812C-470K	47	± 10%	10	2.52	11.5	1.9	260
AISM1812C-560K	56	± 10%	10	2.52	11	2.2	240
AISM1812C-680K	68	± 10%	10	2.52	10	2.6	220
AISM1812C-820K	82	± 10%	10	2.52	9	3.5	200
AISM1812C-101K	100	± 10%	20	0.796	8	4.0	180
AISM1812C-121K	120	± 10%	20	0.796	7.5	4.5	160
AISM1812C-151K	150	± 10%	20	0.796	7	6.5	140
AISM1812C-181K	180	± 10%	20	0.796	6.5	7.5	120
AISM1812C-221K	220	± 10%	20	0.796	5.5	9.0	120
AISM1812C-271K	270	± 10%	20	0.796	5	11	100
AISM1812C-331K	330	± 10%	20	0.796	4	13	90

# PHYSICAL CHARACTERISTICS

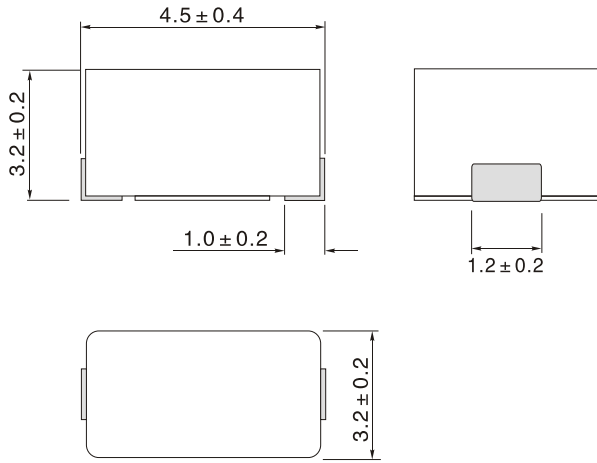

## Winding



- Testing: (Equivalent acceptable)  
Inductance: HP4285A  
RDC: QuadTech 1880 Milliohmeter  
Q: HP4342A  
SRF: HP4291A
- Operating temperature: -25°C to +85°C
- Storage Temperature: -40°C to +85°C
- Resistance to soldering heat: 260°C for 10 seconds
- Marking: Inductance & Tolerance

# DC BIASE CURVE      IMPEDANCE VS FREQUENCY CURVE

